


# Conference System

CE3500

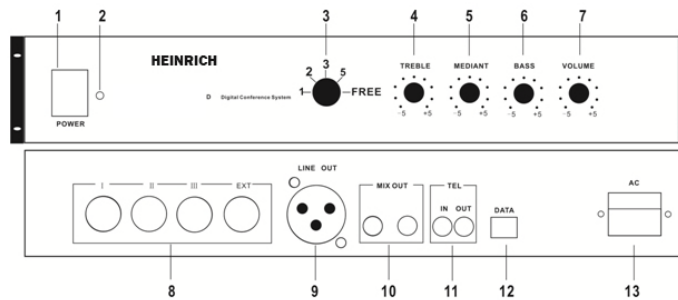

**This is a multi-functional conference system; the system can support 70 units and can be extended to more than 200 units at most.**

## Main unit

- Power consumption of main unit : 450W
- Each unit can support 60 units delegate and chairman microphone, it could be extended to support 200 units microphone by adding more Extension power supply unit.
- With four group 8-DIN socket for multi-line connection
- With one group wired microphone input port, independent volume adjusted
- High fidelity sound quality
- With audio input signal and REC output
- Built-in 1W monitor loudspeaker volume adjusted
- System volume independent adjusted
- RCA input. For telephone coincidence
- XLR output ; Mix output two group—TRS、RCA
- Special "T" type single cable with DIN socket
- 220V/50Hz
- N.G : 5.15kg
- External dimensions : 485mm (includes microphone pipe) ×100mm (2U, includes engine case foot pad) ×355mm (W×H×D) ; It can be put on the table or install in the 19inch standard frame.

# Conference System

MC350A  
MC350B



## Chairman unit

- Frequency response : 40-16000Hz
- Sensitivity : -42dB±2dB
- Speaking reference distance : 20-120cm
- Built-in 1W 8Ω loudspeaker
- The indicative lamp will on when open the microphone
- Microphone was supplied power by main unit
- Has TALK button and indicative lamp, it can control speaking status freely.
- Has automatic closed function : Microphone will off after speech in 45 seconds
- Use connection cables of SYSTEM B type. Has 8P-DIN socket for "T" type connection of system, the extension cables can be ordered according to the real situation of the conference hall.
- Chairman Unit has priority button which can cut the signal of the delegate units, so that it can control the order for conference.

## Delegate unit

- Frequency response : 40-16000Hz
- Sensitivity : -42dB±2dB
- Speaking reference distance 20-120cm
- Built-in 1W 8Ω loudspeaker
- The indicative lamp will on when open the microphone
- Microphone was supplied power by main unit
- Has TALK button and indicative lamp, it can control speaking status freely.
- Has automatic closed function : Microphone will off after speech in 45 seconds
- Use connection cables of SYSTEM B type. Has 8P-DIN socket for "T" type connection of system, the extension cables can be ordered according to the real situation of the conference hall.