

6" Fireproof Ceiling Speaker (1.5W-3W-6W)

Features

- Commercial fireproof ceiling speaker with transformer.
- Ideal for school, office, hotel and airport voice evacuation and PA system.
- Compliant with the EN54-24 EVAC standard.
- Ceramic connector, fire dome, 95°C fire-resistant cable and thermal fuse.
- Rated power output 1.5W-3W-6W at 100V.
- 6" full range paper woofer.
- Line input 100V or 70V with transformer.
- Metal enclosure, metal grille in white and fire dome in red.
- In-ceiling quick installation by spring clip.


FCMS6/DIN



Specification

Model	FCMS6/DIN
Description	6" Fireproof Ceiling Speaker
Rated Power Output	1.5W-3W-6W
Line Input	100V or 70V
Frequency Response	120-18KHz
SPL(@1W/m)	92dB
Speaker Unit	6" full range paper woofer
Cutout Size	204mm
Dimension	230(D)×133(H)mm
Material	Metal enclosure, metal grille in white and fire dome in red
Mounting Way	In-ceiling spring clip quick installation
Weight	1.7kg

Dimension & Side View:

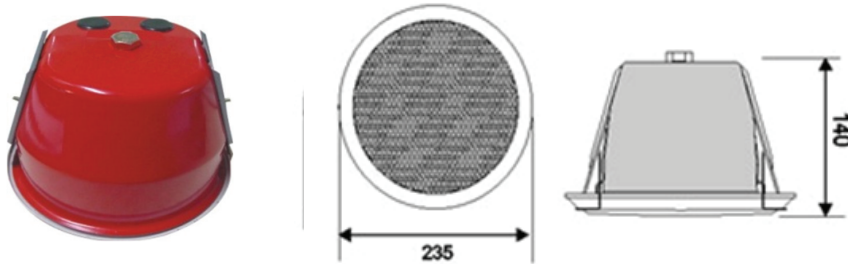

Frequency Response & SPL Diagram:

