

8" Fireproof Ceiling Speaker (1.5W-8W)

Features

- Commercial fireproof ceiling speaker with transformer.
- Ideal for school, office, hotel and airport voice evacuation and PA system.
- Compliant with the EN54-24 EVAC standard.
- Ceramic connector, fire dome, 95°C fire-resistant cable and thermal fuse.
- Rated power output 0.75W-1.5W-3W-6W at 100V.
- 8" full range paper woofer.
- Line input 100V or 70V with transformer.
- Metal enclosure, metal grille in white and fire dome in red.
- In-ceiling quick installation by spring clip.


FCMS8/DIN



Specification

| | |
|---------------------------|---|
| Model | FCMS8/DIN |
| Description | 8" Fireproof Ceiling Speaker |
| Rated Power Output | 0.75W-1.5W-3W-6W |
| Line Input | 100V or 70V |
| Frequency Response | 110-18KHz |
| SPL(@1W/m) | 92dB |
| Speaker Unit | 8" full range paper woofer |
| Cutout Size | 230mm |
| Dimension | 270(D)×133(H)mm |
| Material | Metal enclosure, metal grille in white and fire dome in red |
| Mounting Way | In-ceiling spring clip quick installation |
| Weight | 2.3kg |

Dimension & Side View:

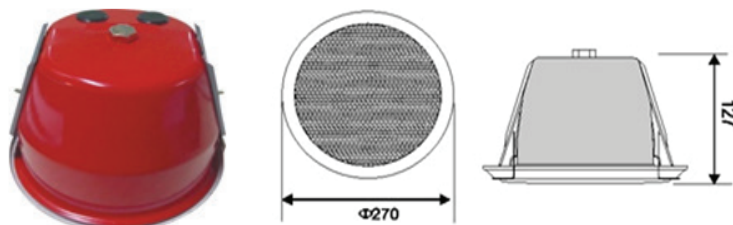

Frequency Response & SPL Diagram:

