

5" Active Wall Mount Speaker (Black in Pair, 2×20W)

HD-20T



FEATURES

- Powered speaker with class AB amplifier of stereo sound system
- Two way speaker system, 5" woofer and 1.5" tweeter
- Ideal for school, hospital, meeting room projector and laptop use
- First-level Hi-fi sound quality
- Input support laptop, Ipod, Iphone and microphone
- 20 watts stereo at 8ohms output
- Mounting bracket is supplied
- RS232 control port and remote control could be customized if order quantity is attractive, default specification not include this feature

DESCRIPTION

The Heinrich HD-20T , 20W , 5" woofer

HEINRICH all speakers support EASE, CATT, ULYSSES models for acoustic studies. This means the acoustic model can be designed to simulate the sound quality and distribution prior to installation All HEINRICH loudspeaker have undergone trogh testing procedure to ensure that all products compliance with LOW VOLTAGE DIRECTIVE (BS EN 60065, 2003) and EMC (BS EN 61000-6-Part 1/2/3/4).

The HD-20T is a 5" stereo loudspeaker set that consists of a passive loudspeaker and an active loudspeaker. It is ideal choice for AV applications such as meeting room, multi-media class room for small presentations.

The active

loudspeaker package is designed with volume and tone controls, accurate clip indicators and built-in a stereo amplifiers. The rated power output is 20W at 8ohms system.


ABS cabinet, metal grille and metal mounting bracket are of black finish, the easy mounting bracket is supplied in the packaging.

SPECIFICATION


Model	HD-20T (Black)
RMS	20W x 2 @ 8Ω
Input Sensitivity	0.5V
Frequency Response	80Hz-18KHz/1W, ±0.5dB
THD	20Hz-20KHz/1W, 0.05%
Damping Factor	>200@8Ω/400Hz
Conversion Rate	30V/US
Channel Degree of Separation	>75dB
S.N. Ratio	>95dB
Amplifier	AB class
Indication	Power and channel signal
Protection	High temp, overload, short circuit and clip
Treble Control	±10dB
Bass Control	±10dB
Input Connector	Balanced phoenix connector, dual RCA and stereo 3.5mm earphone input
AC Power Supply	220V~240V/50Hz~60Hz
Mounting	170x 185x 250mm
Weight	4.7Kg (per pair)

5" Active Wall Mount Speaker (Black in Pair, 2x20W)

Appearance:

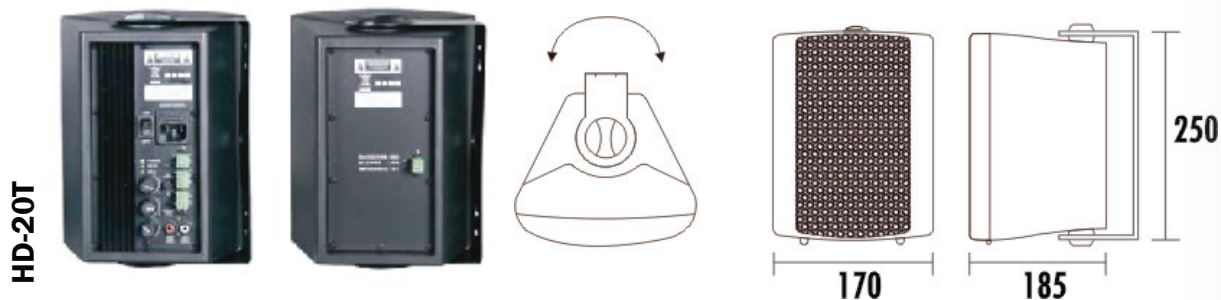

Direction Diagram:

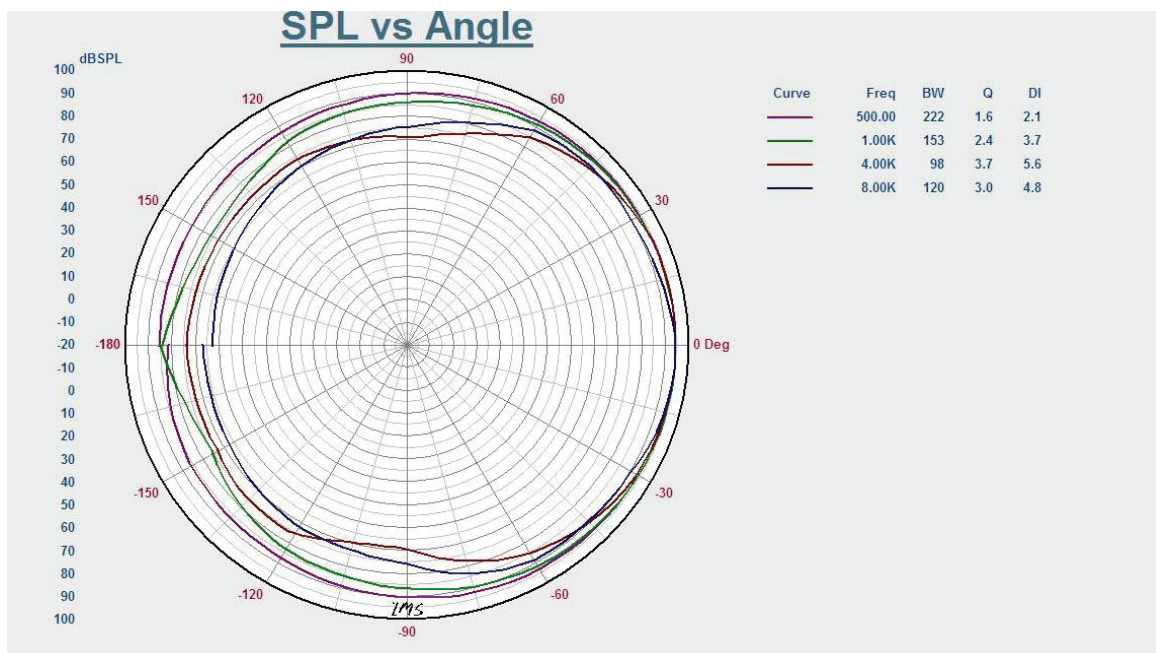

Frequency Response:

