

# Waterproof Landscape 15W Garden Speaker

**OGS-15TP**



## FEATURE:

- Built-in 100v/70v transformer
- Landscape garden loudspeaker for park or garden use
- IP66 waterproof level
- 6"+ 3" two way waterproof speaker driver
- Power taps at 7.5W & 15W @100V
- Aluminum material of green color
- Heavy damage proof finish

## DESCRIPTION:

HEINRICH all speakers support EASE, CATT, ULYSSES models for acoustic studies. This means the acoustic model can be designed to simulate the sound quality and distribution prior to installation. All HEINRICH loudspeakers have undergone trogh testing procedure to ensure that all products compliance with LOW VOLTAGE DIRECTIVE (BS EN 60065, 2003) and EMC (BS EN 61000-6-Part 1/2/3/4).

The OGS-15TP is a landscape garden speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers. The built-in 6"+ 3" two way waterproof speaker driver is designed of wide frequency response 100-10kHz, the multiple power taps of 7.5W & 15W could meet different applications varies from room size and ambient noise surroundings. The organic resin enclosure is of green color and of weatherproof and heavy damage proof finish. Easy and secure wall mount installation in outdoor area. It is ideal choice for park, playground, swimming pool and garden etc outdoor applications where background music and paging is needed. It is designed of IP66 waterproof level, so it could be directly exposed to outdoor severe environment, the organic resin material is strong resistant to cold, snow, ice, high temp and sunshine.


As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice

# Waterproof Landscape 15W Garden Speaker

## SPECIFICATION:

<b>Model</b>	<b>OGS-15TP</b>
Power Taps @100V	7.5W/ 15W
Power Taps @70V	3.8W/ 7.5W
Impedance	Black : Com White : 1.3K $\Omega$ Green : 670 $\Omega$
SPL(1W/1M)	96dB
Max. SPL (Rated W/1M)	110dB
Frequency Response (-10dB)	100-10KHz
Finish	Aluminum alloy enclosure
Speaker Driver	6"x1 3"x 1
IP Rate	IP66
Cutout Size	185 x 185 x 185mm
Dimensions (mm)	H : 435
Weight	6.6Kg

Direction Diagram:

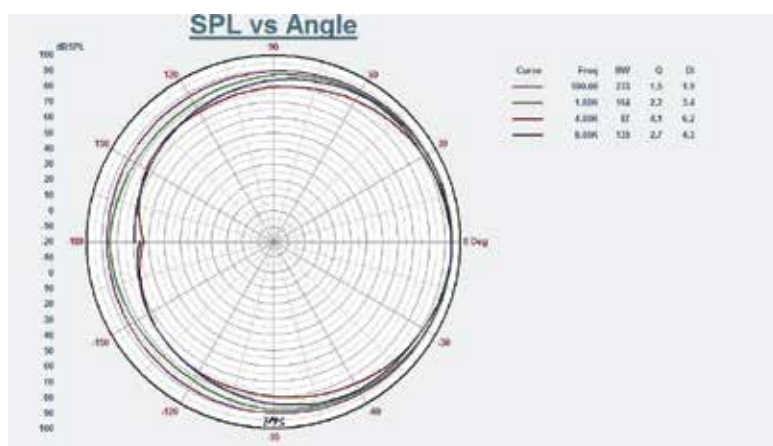

Frequency Response:



As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice