

8" Two Way Wall Mount Speaker

WS-60T



DESCRIPTION:

HEINRICH all speakers support EASE, CATT, ULYSSES models for acoustic studies. This means the acoustic model can be designed to simulate the sound quality and distribution prior to installation. All HEINRICH loudspeakers have undergone thorough testing procedures to ensure that all products comply with LOW VOLTAGE DIRECTIVE (BS EN 60065, 2003) and MC (BS EN 61000-6-Part 1/2/3/4).

The WS-60T is a wall mount speaker built-in 70V/100V transformer. This technique reduces line losses on longer distances and allows easy parallel connection of multiple loudspeakers. The built-in 8"+2" two-way speaker driver is designed of wide frequency response 120-22kHz. The multiple power taps 60W, 30W, 15W, 7.5W are helpful for different applications, varying from room size and ambient noise surroundings. The metal grille, ABS enclosure and stainless mounting bracket are of black colour. Easy & secure wall mount installation through the supplied mounting kit. It is an ideal choice for industrial and commercial applications in hotels, schools, offices and factories where background music and paging is needed.

FEATURE:

- Built-in 70V & 100V transformer
- 8"+2" two-way wall mount speaker
- Economy range speaker of excellent sound quality
- Power taps 60W, 30W, 15W, 7.5W @200V/70V output
- Both 100V and 8 Ohm output selector
- 360-degree rotatable mounting bracket is supplied
- Metal grille, ABS body and metal bracket
- Fashion speaker of black colour


As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice

8" Two Way Wall Mount Speaker

SPECIFICATION:

Model	WS-60T
Power Taps @100V	60W, 30W, 15W
Power Taps @70V	30W, 15W, 7.5W
Impedance	Black: Com Red 2K Ω /1K Ω /500 Ω /250 Ω /125 Ω /8 Ω
SPL(1W/1M)	93dB
Max. SPL (Rated W/1M)	115dB
Frequency Response (-10dB)	80 Hz – 22 kHz
Finish	Baffle: ABS Black/White
	Grille : Steel, Black/White
Speaker Driver	8"x1-2"x1
Dimensions	280x225 x 375mm
Weight	6.2Kg
Mounting	With mounting bracket fixed by screw

Direction Diagram:

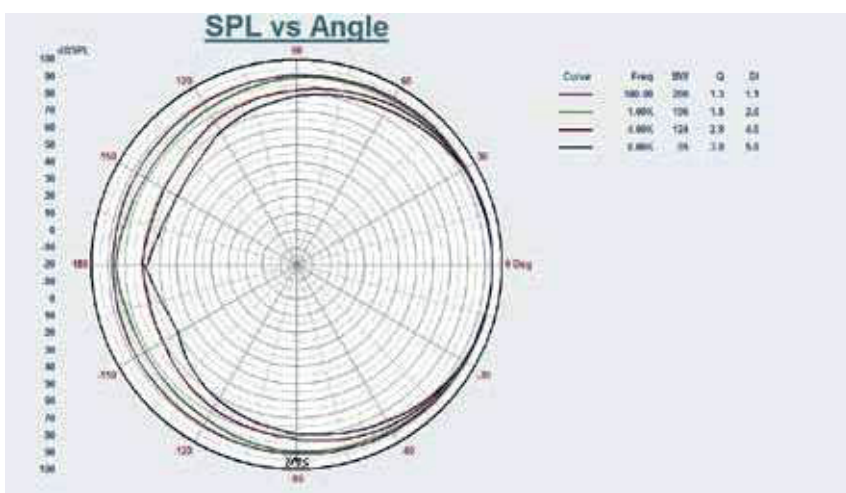

Frequency Response:



As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice