


Outdoor Column Speaker

OCM20/T
OCM40/T
OCM60/T
OCM80/T



DESCRIPTION:

HEINRICH OCM column mount loudspeakers are IP56, and compliance with IEC60849 and EN54 approved are robust, weather-resistant construction, yet are surprisingly stylish each model uses 3.5" full range speakers crossing over to a horn tweeter, it a perfect choice for wall-mounted applications where aesthetic is of prime importance. The aluminium structure sealed with silicone rubber, gasket, makes the OCM Series water resistant, opening angle (H x V) between 200 to 50 Degree @ 1Khz as per BS standard

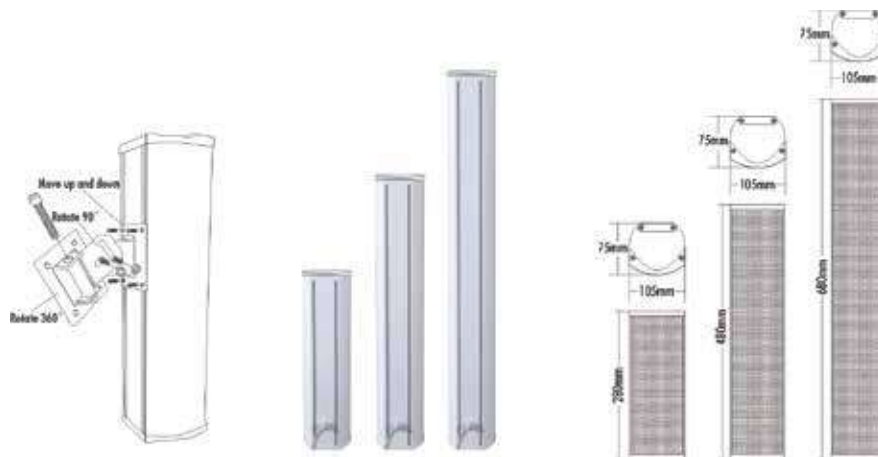

As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice

Outdoor Column Speaker

SPECIFICATION:

Model	OCM20/T
power Taps@100V	10W, 20W
Power Taps@70V	5W, 10W
SPL	90dB±3dB
Impedance	Black-COM, Green-500 Ω, white-1k Ω
Frequency Response	90Hz - 20KHz
IP Rate	IPx6
Dimension	105 x 75 x 280mm
Speaker Driver	2x3.5"
Weight	2.2kg
Model	OCM40/T
power Taps@100V	20W, 40W
Power Taps@70V	10W, 20W
SPL	90dB±3dB
Impedance	Black-COM, Green-250 Ω, white-500 Ω
Frequency Response	90Hz - 20KHz
IP Rate	IPx6
Dimension	105 x 75 x 480mm
Speaker Driver	4x3.5"
Weight	3.9kg
Model	OCM60/T
power Taps@100V	30W, 60W
Power Taps@70V	15W, 30W
SPL	92dB±3dB
Impedance	Black-COM, Green-167 Ω, white-330 Ω
Frequency Response	90Hz - 20KHz
IP Rate	IPx6
Dimension	105 x 75 x 680mm
Speaker Driver	6x3.5"
Weight	5.6kg
Model	OCM80/T
power Taps@100V	40W, 80W
Power Taps@70V	20W, 40W
SPL	93dB±3dB
Impedance	Black-COM, Green-125 Ω, white-250 Ω
Frequency Response	90Hz - 20Kz
IP Rate	IPx6
Dimension	105 x 75 x 880mm
Speaker Driver	8x3.5"
Weight	7.9kg

As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice