

4" Two-Way 15W Wall Mount Speaker

WS15/T




DESCRIPTION:

HEINRICH all speakers support EASE, CATT, ULYSSES models for acoustic studies. This means the acoustic model can be designed to simulate the sound quality and distribution prior to installation. All HEINRICH loudspeaker has undergone thorough testing procedure to ensure that all products compliance with LOW VOLTAGE DIRECTIVE (BS EN 60065, 2003) and EMC (BS EN 61000-6-Part 1/2/3/4).

Heinrich's WS15/T is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers. The built-in 4"+1.5" two ways speaker driver is designed of wide frequency response 120-15kHz, the RMS 15 watts power outputs are suitable for most of the applications. The metal grille, ABS enclosure and stainless mounting bracket are of black color. Easy and secure wall mount installation through the supplied mounting bracket. It is ideal choice for industrial and commercial applications in hotel, school, shopping mall office and factory where background music and paging is needed.

FEATURE:

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 4" +1.5" two ways speaker unit
- RMS 15W @100V
- Metal grille, ABS enclosure and stainless mounting bracket

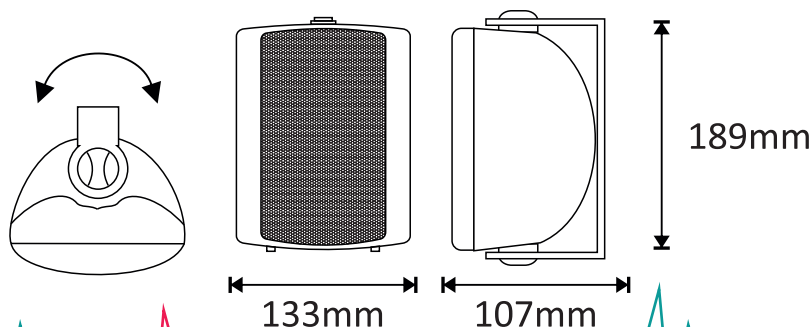


4" Two-Way 15W Wall Mount Speaker


SPECIFICATION:

Model	WS15/T
Power Taps @100V	15W / 7.5W / 3.75W
Power Taps @70V	7.5W / 3.75W / 1.87W
Impedance	Black: Com Red: 670 Ω
SPL(1W/1M)	88dB \pm 3dB
Max. SPL (Rated W/1M)	99dB
Frequency Response (-10dB)	120-15KHz
Finish	Baffle: ABS Black/White Grille: Steel, Black/White
Speaker Driver	4"x1-1.5"x1
Dimensions	189 x 133 x 107mm
Weight	1.8Kg
Mounting	With mounting bracket fixed by screw

Direction Diagram:

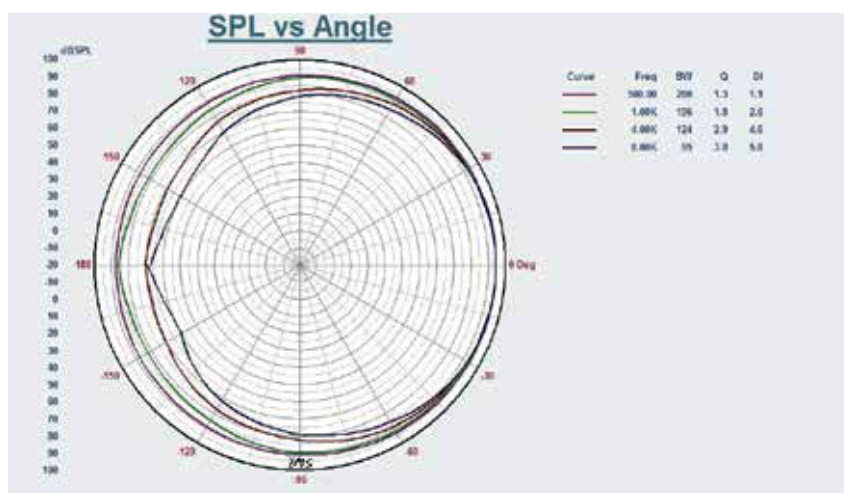

Frequency Response:

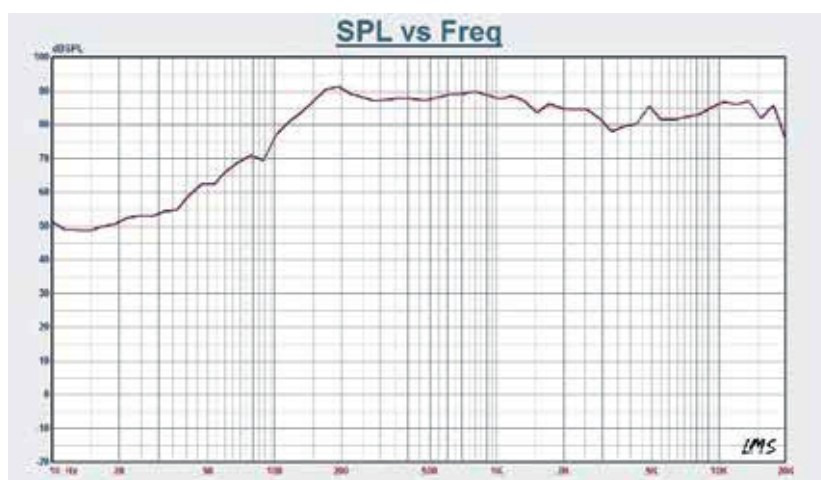

As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice