

Ceiling Speaker (3W/6W/9W)

CMS6/T



Features

- * Built-in 100v/70v transformer
- * In-ceiling type loudspeaker
- * 6" speaker unit
- * Power taps 3W/6W /9W @100V
- * Aluminum grille & metal baffle
- * Metal back box could be added

Description

The CMS6/T is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers. The built-in 6" speaker driver is designed of wide frequency response 110-18kHz, the multiple power taps 3W, 6W & 9W are helpful for different applications varies from room size and ambient noise surroundings. The aluminum grille and metal baffle are painted in attractive white color. Its spring clip clamp makes the easy and secure installation. It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


Specifications

Model	CMS6/T
Power Taps @100V	3W/6W/9W
Power Taps @70V	1.5W/ 3W/ 4.5W
Impedance	Black: Com Red: 3.3 KΩ Green: 1.7KΩ White: 1.1KΩ
SPL(1W/1M)	92dB
Max. SPL (Rated W/1M)	106dB
Frequency Response (-10dB)	110-18KHz
Finish	Baffle: Steel, white Grille: Steel , white
Speaker Driver	6" x 1
Cutout Size	220mm
Dimensions	246 x 66mm
Weight	1Kg
Mounting	Spring-Clip


Ceiling Speaker (3W/6W/9W)

Appearance:

CMS6/T

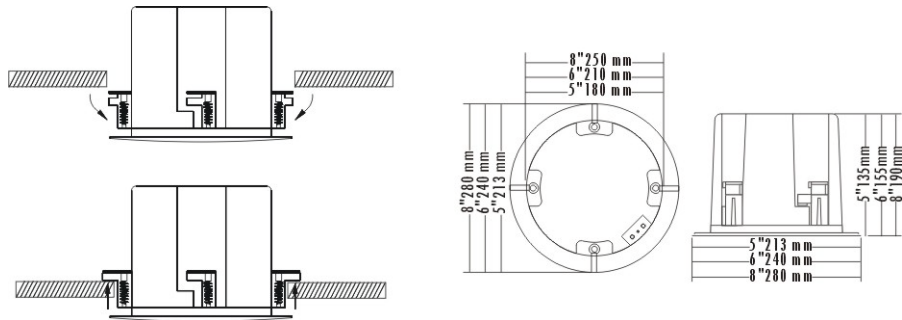

Direction Diagram:

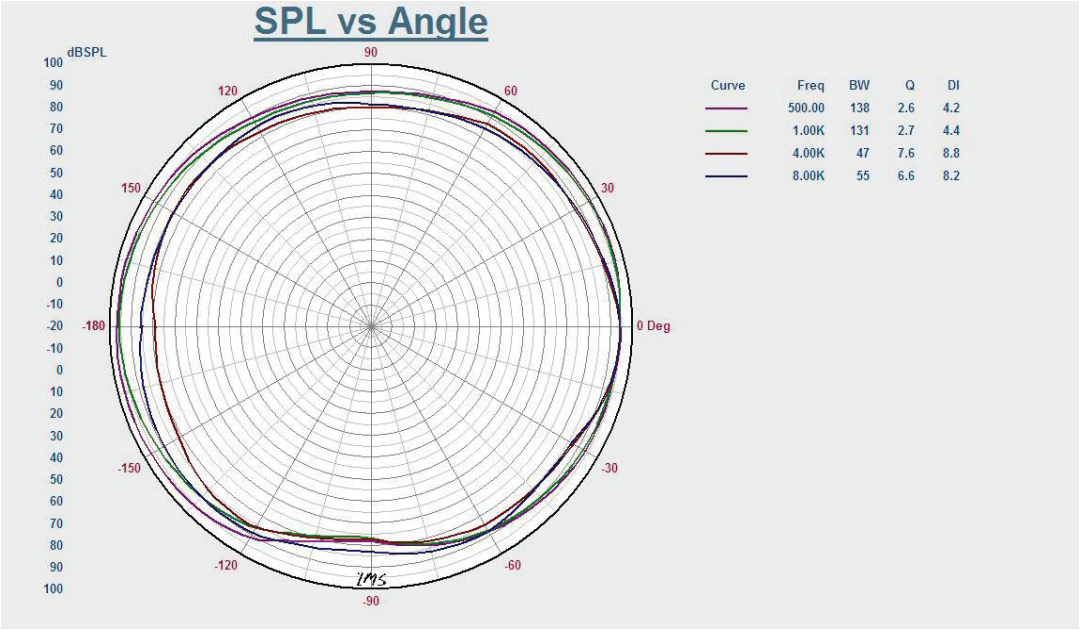

Frequency Response:

